

- Residential and Business Installation & Certification Tool with Channel Plan Auto Discovery
- DOCSIS 3.1 Cable Modem & 1.25 GHz RF Measurement Range with Gigabit Ethernet and 802.11 b/g/n (2.4/5 GHz) Wi-Fi Testing
- Intuitive, Color Touchscreen with Simple Pass/Fail Indicators Reduces Installer Entry Errors and Improves Decision Making
- Multiple Tests in a Single Autotest App Provide a Convenient way to Standardize Tech Processes & Procedures
- Powerful Troubleshooting Tools to Improve the Overall Health of the System



**Business service installation, troubleshooting, and verification all in one compact, powerful device**

### The Standardization Solution

Trilithic's 720 DSP™ conveniently combines CATV, DOCSIS 3.1 Cable Modem, and Gigabit Ethernet testing along with 802.11 b/g/n wireless in a single meter for troubleshooting and installation of both residential and business services.

Multi-service verification can now be achieved with one instrument containing everything needed for service, business, or residential installations. Eliminate the need for multiple instruments in most business services with Gigabit Ethernet Throughput testing and save capital expenditures at the same time.

Tailored for the challenges faced by installers, contractors, and service techs, the 720 DSP comes equipped with all of the powerful troubleshooting tools for the experienced tech, yet helps simplify decision making and streamline standard processes and procedures for the more novice tech. This results in more efficient

technicians, greater overall system health, and allows techs to continue using the same meter as they become more experienced.

### Gigabit Ethernet Testing

Used in combination with other 720 DSP or 1G DSP field analyzers or the 2401 TLB headend Ethernet loopback device, the 720 DSP can achieve throughput testing speeds of up to 1 GbE using a dedicated test port.

The 720 DSP can perform either roundtrip or one-way measurements of Key Parameter Index (KPI) for full Ethernet service testing. With constant payload testing for Layer 2 through Layer 4, the 720 DSP is built for verification of both Ethernet Service Level Agreement (SLA) and Quality of Service (QoS) metrics with support for BERT, RFC 2544, Y.1564, and Y.1731 testing standards.

### Next-Gen Features

The 720 DSP features an intuitive, color touchscreen interface, simple pass/fail indicators, and powerful autotest apps to streamline certification and make the technician's job easier.

Everything about this next-gen meter was built with the business technician in mind—from the long battery life and quick charge time, to its unique, built-in LED flashlight and glow in the dark keypad for those dark, cramped spaces.

With its next-generation smart device technology, the 720 DSP is the easiest to use, most feature-rich, and best-performing meter available for installation and troubleshooting of business customer accounts.

**innovative technology to keep you a *step ahead***

**AVAILABLE MODELS:**

- 720 DSP w/ 1 Gb Ethernet  
P/N 2011757XXX

**STANDARD INTERFACES:**

- Dual RF Test Ports (F-Type)
- DOCSIS 3.1 modem (1/2.5 Gbps)
- RJ45 Management Port (10/100 Mbps)
- Cable Modem Thru RJ45
- RJ45 Electrical Ethernet & SFP Optical Ethernet Test Ports (10/100/1000 Mbps)
- 802.11 "b/g/n" 2.4/5 GHz Wi-Fi
- USB 2.0 Flash Drive Port

**The 720 DSP supports a variety of functions, including:**

- Auto discovery of channel plans
- Multi-user and multi-language support
- Create jobs right on the meter
- Built-in web browser, real-time data transmission
- Interactive autotesting apps

**STANDARD TESTING FEATURES:**


- Level Measurement
- C/N Measurement
- QAM Measurement (MER/BER/Constellation/EQ)
- Complete Channel Plan Scan with Tilt Measurement
- Analog & Digital HUM Measurement
- Return Spectrum Analysis (4 to 110 MHz)
- Forward Spectrum Analysis (5 to 1250 MHz)
- Cable Modem Statistics
- Ping, Trace Route, VoIP & Throughput Measurements
- Ethernet Service Testing (BERT, RFC 2544, Y.1564 & Y.1731)
- Frequency Domain Reflectometer
- Upstream Linear Distortions Measurement

**OPTIONAL TESTING FEATURES:**

- Bluetooth Communications Adapter
- QAM Error Vector Spectrum Analysis
- Source Generator (CW, QAM & OFDM)
- Upstream TrafficControl Plus
- Cable Modem Sweep

### Simple Yet Powerful

Providing the widest range of standard functions for an installer available today, the 720 DSP includes virtually all the testing options an installer or service technician needs to verify service quality and easily identify and fix problems in the field.

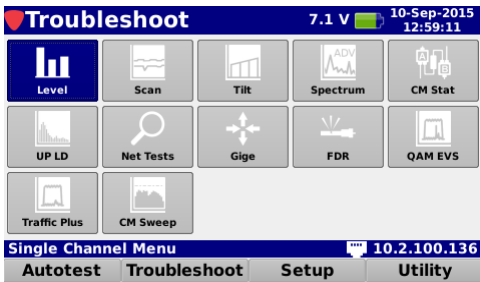

### Autotest Apps

The 720 DSP features next-generation autotest applications that practically walk the technician through a job. By performing standardized measurement tests at various required locations on the job site using user set test plans, channel plans, and limit sets, the meter very clearly indicates (using color and symbols) what areas still need attention, before the technician leaves the job site.




Multi-user support allows technicians that work in various territories to easily switch channel plans, standardized autotest apps, and test limits, or login as a completely different user. Connecting to ViewPoint allows techs to upload job data in near real-time, as well as transmit and receive channel plans, autotests, and firmware.

Leaving less room for entry error, this new, simple user interface can translate into less training and more efficient time in the field for techs. The 720 DSP comes equipped with all of the required troubleshooting tools for the advanced technician. It also offers a higher comfort factor for novice technicians, reducing decision making in the field, which can ultimately result in more productive work days and more satisfied customers.

### Justify ROI

Field operations managers can now easily verify that all of their technicians are performing the proper tests and are doing so at the right place and time—in near real-time. The potential benefits include identifying techs who need additional training, improving team performance, reducing truck rolls, and cutting operating costs.

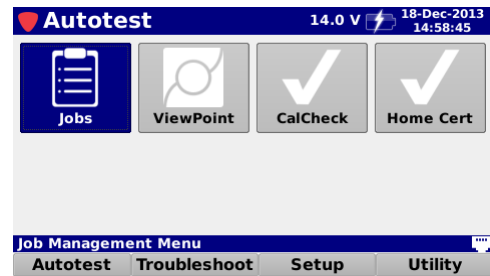

At a higher level, ViewPoint can deliver simple, standardized, system-wide reports and dashboards that can help a director or VP of technical operations view the entire operation at a glance to gain information that can be used to reduce service and repeat trouble calls.

Essentially, this integrated system approach allows cable operators to see much more of their certification operations and use the information in practical ways. The insights can enable them to identify both localized problems and high-level system issues to make decisions based on a clearer understanding of their overall operations and the associated ROI.

viewpoint		Meter	Tech ID
		360133722	9710
Receive (28)		Send (24)	
Channel Plans	4/4	Jobs	0
Limit Sets	6/6	Data Logs	14
Autotests	3/3	Screen Shots	10
Ethernet Limit Sets	1/1		
Ethernet Frames	6/6		
Ethernet Streams	8/8		
Ethernet Targets	0/0		
Settings	0/0		
<b>Ready</b>			
			<b>Sync</b>

Combining 720 DSPs in the field with the new ViewPoint WFM Module in the back office, managers can view the health of their entire system—in near real-time, for total RF installation management.

# 720DSP with Docsis 3.1

Business Services Meter


## TOTAL SYSTEM MANAGEMENT

Combining the 180 DSP, 360 DSP, 720 DSP & 1G DSP meters in the field with the new ViewPoint Integrated Server in the back office, managers now have simplified access to intelligent management tools for monitoring, assessing and improving the efficiency of their total operation while making it even easier to obtain consistent, repeatable results that give supervisors that birds-eye view of the field for Total System Management.



By unifying an entire MSO's field operations in one convenient dashboard, managers can easily verify compliance and quality throughout the entire plant, either by home, system, region, division, or any other attribute from a billing system.



This simple and completely customizable integrated system of field analysis and reporting tools allows managers to watch over their entire field operations in one dashboard, comparing each location in the system, analyzing the overall health of their entire organization, and addressing concerns in near real-time.

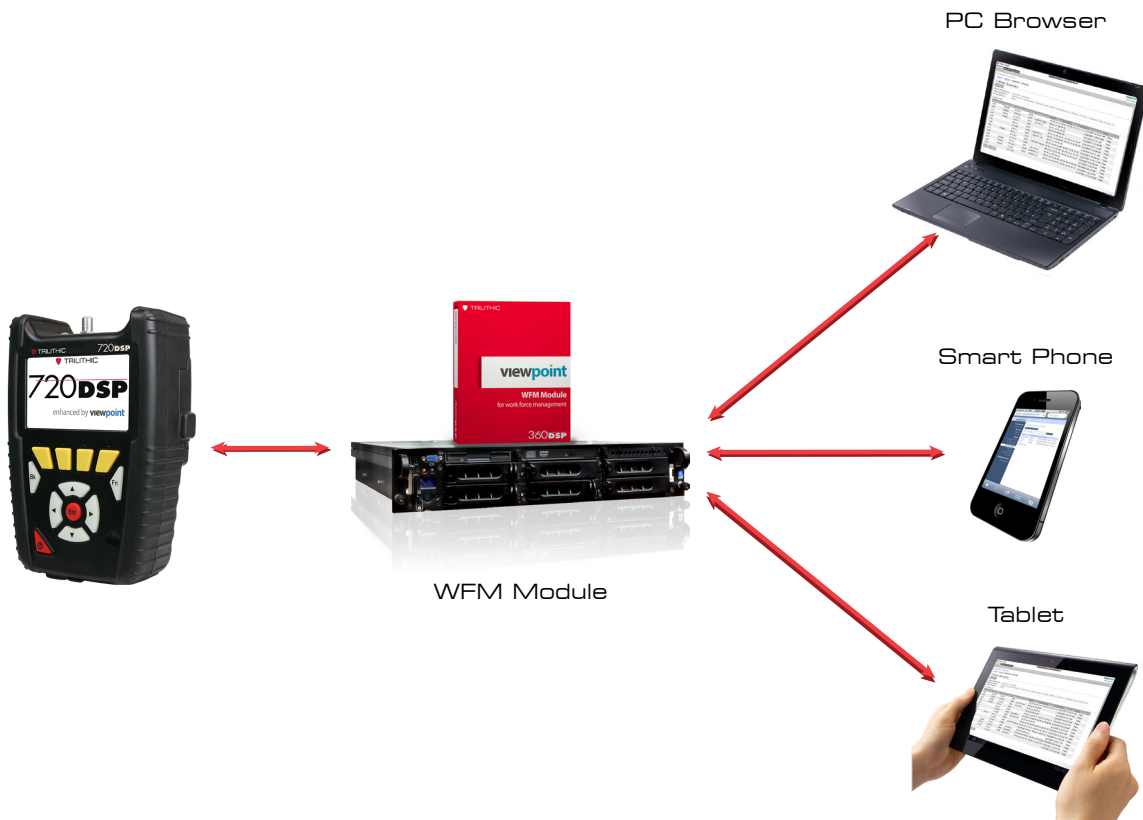

innovative technology to keep you a *step ahead*

DUAL RF TEST PORTS & SOURCE GENERATOR (OPTIONAL)

- The meter features two (2) built-in test ports (standard) for RF loopback testing that allow for the simultaneous transmission of a source signal from the TX Port and the measurement of the same signal using the TX/RX Port
- The *Source Generator Option* provides the ability to transmit continuous wave (CW), 16 to 256 QAM, or 4K/8K OFDM carriers within the return band from 5 to 85 MHz with user-adjustable bit error injection
- When combined, these features allow maintenance techs to use a single field analyzer to identify issues with active and passive devices, such as amplifiers, nodes, pads, and cables

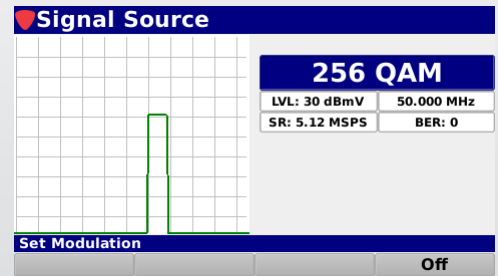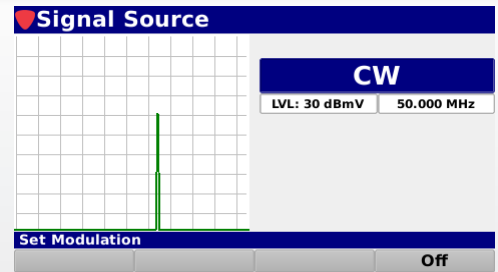






LEVEL MEASUREMENTS


Single Frequency Pilot Carriers

- Shows a bar graph for the level of the selected single frequency carrier channel
- Provides Pass/Fail results for Level and Carrier-to-Noise measurements when compared against user-defined limit sets

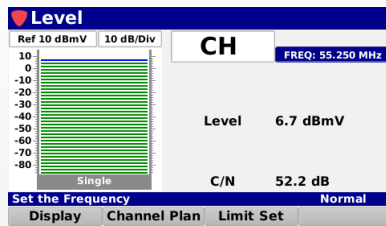


SQ-QAM Carriers

- Shows a bar graph for the level of the selected digital SC-QAM channel
- Provides Pass/Fail results for Level, Pre-BER, Post-BER, and MER measurements when compared against user-defined limit sets

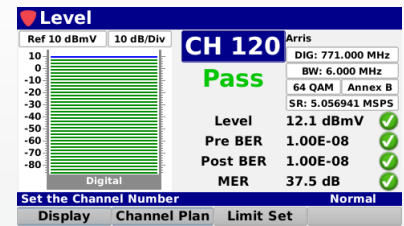


NTSC/PAL/SECAM Carriers

- Shows a bar graph for the video and audio levels of the selected analog channel
- Provides Pass/Fail results for Video Level, Audio Level, Delta V/A, and Carrier-to-Noise measurements when compared against user-defined limit sets

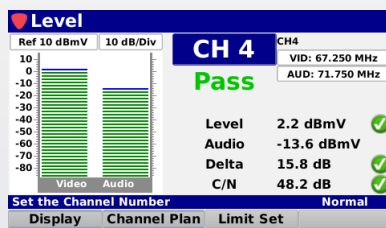


OFDM Carriers

- Shows the Physical Link Channel (PLC) frequency and a bar graph for the level of the selected digital OFDM channel
- Provides Pass/Fail results for Average Level, Max P/V, and Tilt measurements when compared against user-defined limit sets

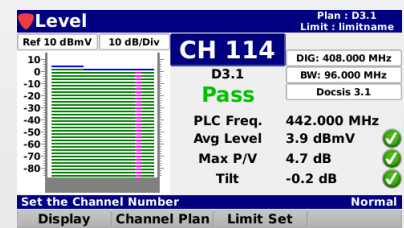


Analog & Digital HUM Measurement

- Measure the amplitude of 50/60 Hz, 100/120 Hz, and low frequency interference present on analog or digital channels
- Provides Pass/Fail results for limit sets

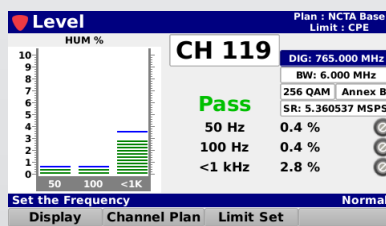

DOCSIS 3.1 Channel Information


- Displays the PLC, BPSK Sub-Carriers, Blocks of QAM Sub-Carriers, and Exclusion Zones defined within Profile A of the DOCSIS 3.1 OFDM Channel
- Provides Markers for closer inspection of individual carriers, which include the start/stop frequency of the carrier as well as its type and modulation

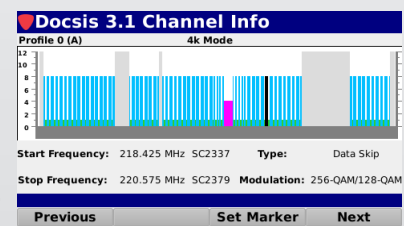

CONSTELLATION MEASUREMENTS


SC-QAM

- Shows the constellation diagram of the selected digital SC-QAM channel
- Provides Pass/Fail results for Level, Pre-BER, Post-BER, and MER measurements when compared against user-defined limit sets

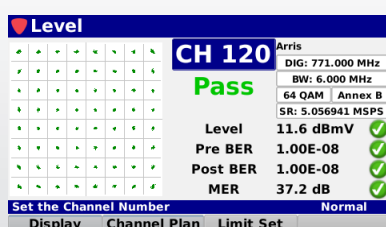

OFDM Physical Link Channels (PLC)


- Shows the constellation diagram for the PLC continuous pilots, BPSK symbols, and 16 QAM data of the selected digital OFDM channel
- Provides Pass/Fail results for PLC Level, Pre-BER, Post-BER, and MER measurements when compared against user-defined limit sets

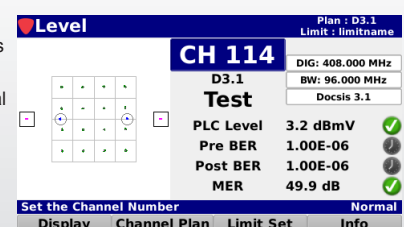

## MULTI-CHANNEL MEASUREMENTS


### Channel Plan Scan

- Full channel plan scan displays the frequency response of the entire channel lineup
- Provides Pass/Fail results for limit sets and color-coded channels; blue for analog, green for SC-QAM digital, and aqua for OFDM digital

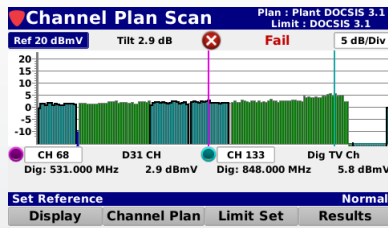

### Tilt Measurement


- Full channel plan scan displays the frequency response of the entire channel lineup
- Provides Pass/Fail results for limit sets and color-coded channels; green for digital and blue for analog
- Tilt shows the level difference between two selectable channels

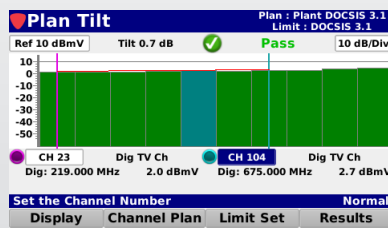

## DIGITAL TROUBLESHOOTING


### Equalizer Tap Display

- Shows the equalizer tap levels of the selected digital SC-QAM channel in comparison to the DOCSIS specification for allowable correction
- Easy identification with Pass/Fail results for RF issues and impairments related to group-delay and microreflections

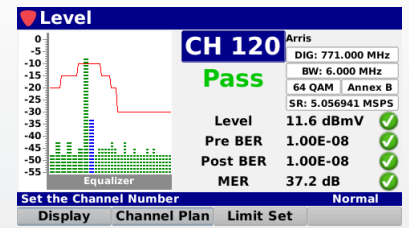

### BER-Over-Time Display


- Shows the BER measurement of the selected digital SC-QAM channel over a user-defined time period
- The graph displays green lines for Pre-BER and red lines for Post-BER and provides Pass/Fail results for Level, Pre-BER, Post-BER, and MER measurements when compared against user-defined limit sets

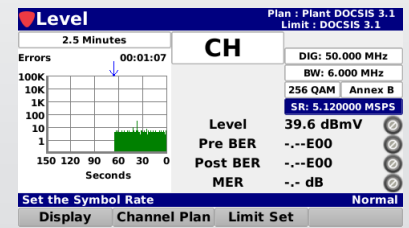

## SPECTRUM MEASUREMENTS


### Return Spectrum Measurement

- Provides the ability to view raw return spectrum traces from 4 to 110 MHz
- Fast DSP spectrum snapshots give the user extreme speed to capture fast transients on the upstream

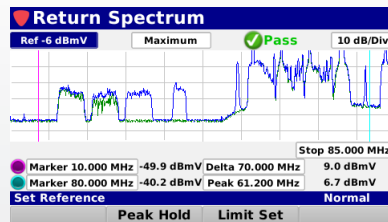


### Full Spectrum Measurement

- Provides the ability to view raw forward spectrum traces from 5 to 1250 MHz
- Fast DSP spectrum snapshots give the user extreme speed to capture fast transients on the downstream

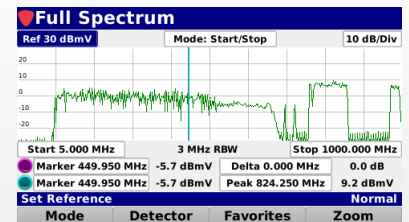


### OFDM Channel Spectrum

- Provides the ability to view raw forward and return spectrum traces of full 24 to 192 MHz OFDM channels
- Fast DSP spectrum snapshots give the user extreme speed to capture fast transients on the upstream and downstream

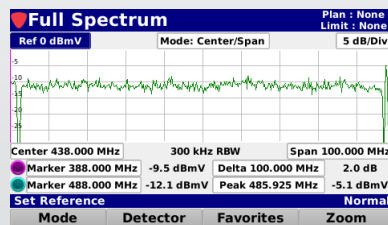

### OFDM Physical Link Channels (PLC)

- Provides the ability to view raw spectrum traces of the continuous pilot carriers needed for locking onto an OFDM signal
- Identify locations of ingress or interference that could potentially affect the PLC

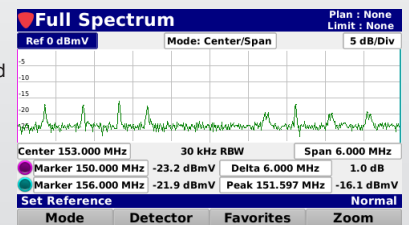




CABLE MODEM MEASUREMENTS


Cable Modem Network Connectivity & Status

- The Network Manager view allows users to quickly and easily use the internal cable modem for network connectivity and performance testing
- Upon connecting, the Network Manager displays the MAC address, IP address, subnet, gateway, and DNS information for the cable modem network connection
- The Cable Modem Statistics view provides a summary that displays the type of Cable Modem being used, meter IP address, and modem IP address
- This view also displays the current channel bonding along with the min/max/avg Rx Level & BER of the downstream channels and the min/max/avg Tx Level of the downstream channels

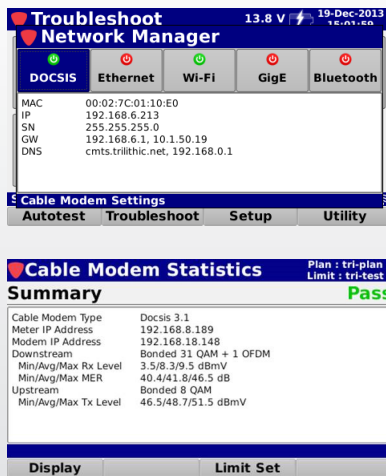

Upstream & Downstream Cable Modem Statistics


- Internal DOCSIS 3.1 modem that operates in both DOCSIS 3.0 (32x8) and DOCSIS 3.1 modes
- Measure up to eight (8) upstream SC-QAM channels
- Displays the ID, channel frequency, Tx Level, SNR, PreBER, and Post BER of each upstream channel
- Measure up to 32 downstream SC-QAM channels when operating in a DOCSIS 3.0 only environment
- Measure up to two (2) downstream OFDM channels and 30 downstream SC-QAM channels when operating in a mixed DOCSIS 3.0 & DOCSIS 3.1 environment
- Displays the primary status, channel frequency, Rx Level, SNR, PreBER, and Post BER of each downstream channel

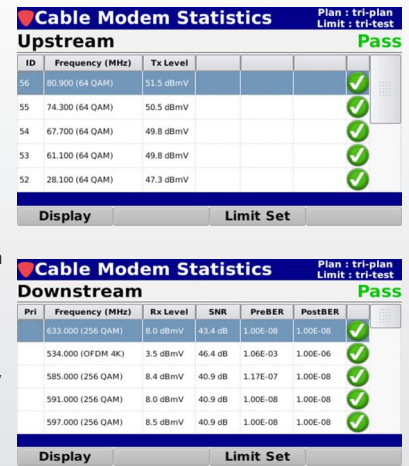

IN-BAND RETURN SWEEP (OPTIONAL)

Cable Modem (CM) Sweep


- The *CM Sweep Option* is a first of its kind, patent pending sweep that uses the cable modem built into the meter to perform in-band sweeps within your modem carriers
- This feature not only allows operators to balance the upstream, but also allows them to see the percentage of pre-equalizer effort and isolate problems between active components without causing any issues with upstream modem performance
- When this function is selected, the meter injects up to four upstream modem carriers to talk back to the CMTS and use the pre-equalized data for each of the upstream carriers to plot a frequency response of what your upstream sweep would look like with injected carriers
- This feature doesn't require any expensive headend sweep gear and works with any DOCSIS 3.0 or DOCSIS 3.1 compatible CMTS with pre-EQ enabled

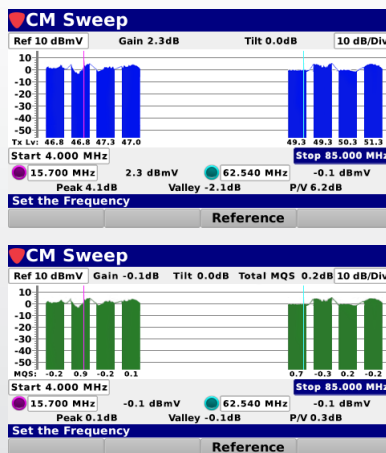

INGRESS UNDER CARRIER MEASUREMENTS


Upstream Traffic Control Plus (OPTIONAL)

- Allows for a high-speed real-time view of ingress in the upstream
- Heat map allows for simplified view of ingress hotspots
- 100% coverage so technicians can see the shortest cable modem bursts and ingress even under the busiest upstream

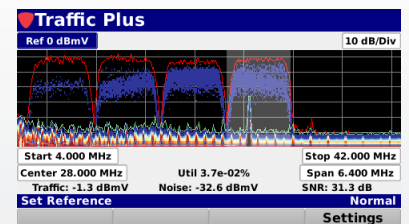

Downstream QAM Error Vector Spectrum (OPTIONAL)


- Tune to downstream QAM channels to display Error Vector Spectrum (EVS)
- Display the ingress that is present "underneath" an upstream cable modem channel, or any bursty signal

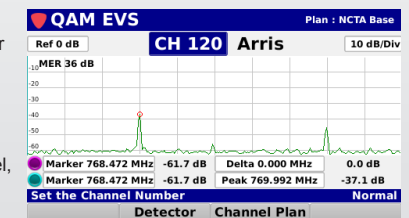




## ETHERNET SERVICE TESTING

The 720 DSP offers comprehensive test and monitoring functions to isolate and solve problems in the network core, edge, NOC, and data center. Designed for construction, customer turn-up, and maintenance applications, the 720 DSP offers numerous built-in tests for complete Ethernet, IP, and LAN testing. The Gigabit Ethernet testing feature works in combination with the TLB-GbE loopback device to perform BERT loopback measurements of Key Parameter Index (KPI) for full Ethernet service testing.

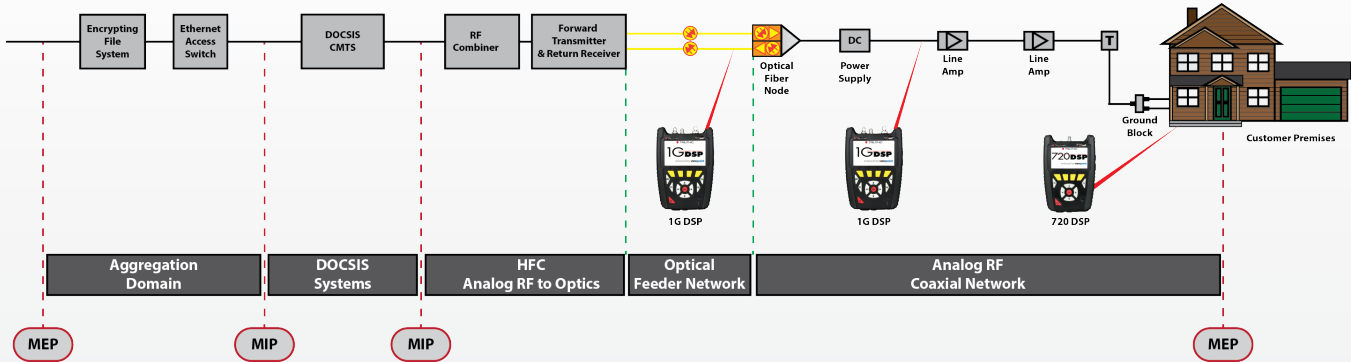


### Ethernet Loopback Functionality

- Provides the ability to measure the optical power through the optical transceiver
- Provides link speed, wavelength, Tx power, and Rx power measurements of active SFP connection

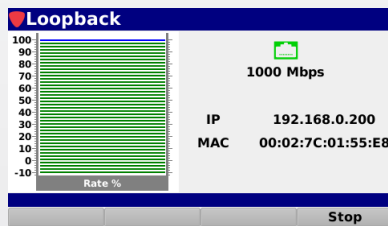


### SFP Optical Power Measurement

- Provides the ability to measure the optical power through the optical transceiver
- Provides link speed, wavelength, Tx power, and Rx power measurements of active SFP connection

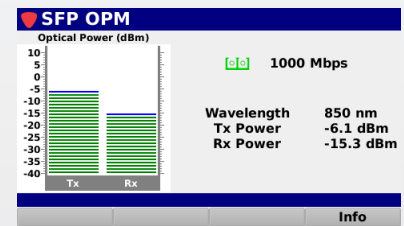


### Gigabit Bit-Error-Rate Testing

- Throughput testing speeds of up to 1 GbE using a dedicated test port
- Roundtrip or one-way constant payload testing for Layer 2-4 for verification of Ethernet SLA and QoS metrics

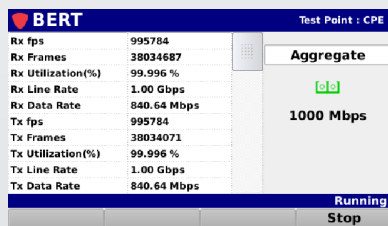


### RFC 2544 Tests for Benchmarking Network Interconnect Devices

- Global configuration settings can be applied to all users of the device, while other settings can be tailored to suit each user
- Setting adjustments can be locked out using the ViewPoint software

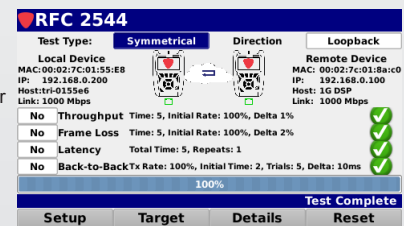


### ITU-T Y.1564 Ethernet Service Activation Testing

- Provides standards-based testing for turning up, installing, and troubleshooting Ethernet-based services
- Allows for complete validation of Ethernet service level agreements (SLAs) in a single test

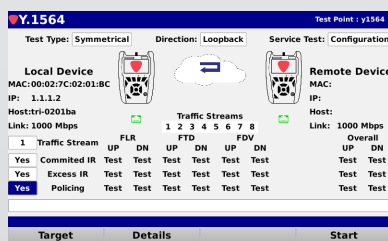

### ITU-T Y.1731 Connectivity Fault Management & Link Performance

- Standardized performance monitoring that includes continuity, loopback, link trace, frame loss, and frame delay
- Allows for complete validation of Ethernet service level agreements (SLAs) in a single test

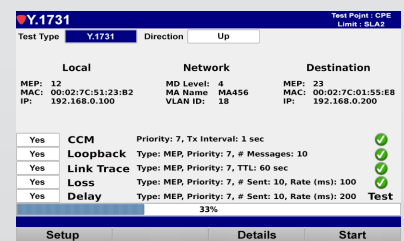

**MEASUREMENT SPECIFICATIONS**
**Level Measurement**

<b>Channel Bandwidth</b>	6 MHz and 8 MHz
<b>Amplitude Range</b>	-40 dBmV to +50 dBmV
<b>Modulation Types</b>	<b>Analog:</b> NTSC, PAL B/D/G/H/I/K/N & SECAM B/D/G/H/I/K <b>Digital:</b> 16/32/64/128/256 QAM Annex A, 64/256 QAM Annex B, OFDM 4K/8K
<b>Analog Measurement Accuracy</b>	±0.75 dB @ 77 °F (25 °C) ±2.0 dB from 0 to 122 °F (-18 to 50 °C)
<b>Digital Measurement Accuracy</b>	±0.75 dB @ 77 °F (25 °C) ±2.5 dB from 0 to 122 °F (-18 to 50 °C)
<b>Resolution</b>	0.1 dB

**Spectrum Measurement**

<b>Frequency Range</b>	<b>Return Path:</b> 4 to 110 MHz <b>Forward Path:</b> 5 to 1250 MHz
<b>Dual Return Path Diplexers</b>	<b>42 MHz:</b> 4 to 42 MHz <b>85 MHz:</b> 4 to 85 MHz
<b>Manually Adjustable Resolution Bandwidth</b>	<b>Return Path:</b> 300 kHz <b>Forward Path:</b> 10, 30, 100, and 300 kHz 1 and 3 MHz
<b>Auto Ranging Resolution Bandwidth</b>	<b>10 kHz:</b> Span ≤ 3.5 MHz <b>30 kHz:</b> Span ≤ 12.0 MHz <b>100 kHz:</b> Span ≤ 35.9 MHz <b>300 kHz:</b> Span ≤ 300 MHz <b>1 MHz:</b> Span ≤ 259.2 MHz <b>3 MHz:</b> Span ≥ 359.3 MHz
<b>Display Spans</b>	<b>Return Path:</b> 4 to 42 MHz, 4 to 65 MHz, 4 to 85 MHz or 4 to 110 MHz <b>Forward Path:</b> User-selectable in 1 kHz steps
<b>Display Scale</b>	1, 2, 5, or 10 dB/division
<b>Display Range</b>	8 vertical divisions (when marker bar is hidden)
<b>Spurious Free Dynamic Range</b>	60 dB @ 25° C (77° F) (+50 dBmV)
<b>Sensitivity</b>	<b>Return Path:</b> -30 dBmV (4 MHz to 110 MHz) <b>Forward Path:</b> -40 dBmV (50 MHz to 1 GHz)

**Digital Channel Measurement**

<b>Deep Interleave Compatibility</b>	Yes
<b>Downstream MER</b>	40 ±2 dB @ +6 dBmV RF Input Level 34 ±2 dB @ -6 dBmV RF Input Level
<b>Downstream BER</b>	<b>Method:</b> True BER, derived from code words not from MER <b>Standard:</b> ITU J.83 annex A, B, C <b>Range:</b> 1 E-7 to 1 E-9 @ -6 dBmV RF Input Level
<b>Symbol Rates</b>	≥ 2 msp/s; ≤ 6.952 msp/s

**Cable Modem Measurement**

<b>Protocol Support</b>	DOCSIS 1.1 / 2.0 / 3.0 / 3.1 SNMP V1, V2c, V3
<b>Compliance Certificates</b>	FCC
<b>Dual CM Diplexers</b>	<b>85 MHz:</b> 5 to 85 MHz <b>200 MHz:</b> 5 to 200 MHz
<b>Receiver Demodulation</b>	<b>Frequency (edge to edge):</b> 108 to 1002 MHz <b>Channel Bandwidth:</b> 6 MHz <b>Signal Level:</b> -15 to 15 dBmV <b>DOCSIS 3.0 Demodulation:</b> 64 QAM, 256 QAM <b>DOCSIS 3.0 Data Rate:</b> Up to 1.2 Gbps with 32 downstream channel bonding (DOCSIS 32x8) <b>DOCSIS 3.1 Demodulation:</b> Multi-Carrier OFDM 16 to 4096 QAM <b>DOCSIS 3.1 Data Rate:</b> Up to 2.5 Gbps with 2 OFDM 196 MHz Downstream Channels
<b>Transmitter Modulation</b>	<b>Frequency (edge to edge):</b> 5 to 85 MHz <b>Signal Level:</b> Controlled by CMTS through power ranging function <b>DOCSIS 3.0 Modulation:</b> QPSK, 8 QAM, 16 QAM, 32 QAM, 64 QAM, and 128 QAM (SCDMA only) <b>DOCSIS 3.0 Data Rate:</b> Up to 320 Mbps with 8 upstream channels bonding <b>DOCSIS 3.1 Modulation:</b> Multi-Carrier OFDMA BPSK to 4096 QAM <b>DOCSIS 3.1 Data Rate:</b> Up to 1 Gbps with 2 OFDMA 96 MHz Upstream Channels

**Carrier-to-Noise Measurement** (In-service, non-scrambled standard channels only)

<b>Minimum Input Level for Full Range</b>	+10 dBmV
<b>Dynamic Range</b>	50 dB
<b>Resolution</b>	< 0.5 dB

**Tilt Measurement**

<b>Max Number of Carriers</b>	14 (dependent on favorite channel setup)
<b>High/Low Delta Resolution</b>	0.1 dB
<b>Scan</b>	Video, audio, pilot, and digital carriers

**Analog & Digital HUM** (In-service, non-scrambled standard channels only)

<b>Minimum Input Level</b>	0 dBmV
<b>Range</b>	0 to 5%
<b>Resolution</b>	0.1%
<b>Accuracy</b>	±0.5%

**Frequency Domain Reflectometer**

<b>Velocity of Propagation</b>	Adjustable from 60.0 to 99.0% in 0.1% increments
<b>Working Distance</b>	<b>Minimum:</b> 755 feet (230 meters) @ VoP of 60.0% <b>Maximum:</b> 1247 feet (380 meters) @ VoP of 99.0%
<b>Amplitude Range</b>	0 to -80 dBRL
<b>Distance Accuracy</b>	5 feet

**Source Generator (Optional)**

<b>Modulation</b>	CW, 16 QAM, 32 QAM, 64 QAM, 128 QAM, 256 QAM, OFDM (4K/8K)
<b>OFDM Subcarrier Modulation</b>	16 to 4096 QAM, PLC Configurable
<b>Frequency Range</b>	5 to 85 MHz
<b>Source Width</b>	<b>CW:</b> 50 kHz <b>QAM:</b> 6 MHz <b>OFDM:</b> 6 to 24 MHz
<b>Amplitude</b>	<b>CW:</b> Adjustable from 10 to 55 dBmV <b>QAM:</b> Adjustable from 10 to 45 dBmV <b>OFDM:</b> Adjustable from 10 to 40 dBmV
<b>QAM Symbol Rates</b>	0.64, 1.28, 2.56, 5.12 MSPS
<b>QAM Error Rates</b>	<b>BER:</b> Adjustable from 0 to 1.00E-2 <b>MER:</b> > 38 dB
<b>CW Source Accuracy</b>	±2 dB



## PHYSICAL & ENVIRONMENTAL SPECIFICATIONS

### Physical Specifications

<b>Construction</b>	Rubber overmolded plastic housing
<b>Control</b>	Glow in the dark keypad and LCD touchscreen and/or via a wireless connection to a mobile device such as a laptop, tablet, iPad® or iPhone®, or Android® handset
<b>Display</b>	Color LCD touchscreen 480 x 272 pixels (approx 4" x 2.25")
<b>Annunciators</b>	Audible annunciator for key strokes
<b>Antenna</b>	Internal Wi-Fi antenna, 2 dB gain
<b>Flashlight</b>	High intensity LED (0.25W)
<b>Dimensions w/o Case (H x W x D)</b>	8.6 x 6.1 x 2.75 in (21.84 x 15.94 x 6.99 cm)
<b>Dimensions w/ Case (H x W x D)</b>	9.6 x 7.1 x 3.75 in (24.38 x 18.03 x 9.53 cm)
<b>Weight w/o Case</b>	3.25 lbs (1.36 Kg)
<b>Weight w/ Case</b>	4.25 lbs (1.93 Kg)

### Available Interface Types

<b>Tx Test Port</b>	75 Ohm Replaceable F-Type Connector Source Generator Output Transmission Only
<b>Tx/Rx Test Port</b>	75 Ohm Replaceable F-Type Connector Upstream & Downstream RF Measurements DOCSIS 3.1 Modem
<b>Ethernet</b>	RJ45 Management Port (10/100 Mbps) RJ45 Electrical Test Port (10/100/1000Base-T) SFP Optical Test Port (100/1000Base-X)
<b>Wi-Fi</b>	802.11 b/g/n 2.4/5 GHz Wi-Fi Adapter
<b>USB</b>	USB 2.0 Type-A Standard Port
<b>Bluetooth (Optional)</b>	Class II Mini Bluetooth USB Adapter (v2.1) with a 10 meter range for speeds up to 3 Mbps

### Battery & Power Specifications

<b>Operating Time</b>	8 to 10 hours, dependent on use
<b>Charge Time</b>	4 hours
<b>Battery</b>	Two 2600 mAh @ 7.4V Li-Ion internal batteries, factory replaceable
<b>Power Adapter</b>	<b>Input:</b> 100 to 240 VAC ~ 47 to 63 Hz, 1.1A Max <b>Output:</b> 15 VDC, 3.3A

### Environmental Specifications

<b>Storage &amp; Operating Temperature</b>	-18° to +50° C (0° to 122° F)
--	-------------------------------

## INCLUDES THE FOLLOWING:

720 DSP Meter  
 Protective Carrying Case  
 Shoulder Strap  
 AC to DC Power Adapter & Battery Charger  
 AC Power Cable  
 Touchscreen Stylus

## SOFTWARE:

ViewPoint Express Configuration Software for the 720 DSP

**P/N 0930215000**

ViewPoint Integrated Server with WFM Module for the 720 DSP

**P/N 2011656002**

ACTS™ Software

**P/N 0930144000**

## RELATED PRODUCTS:

Precision Test Cable (I/O-15)

**P/N 2071527048**

I-Stop 1 GHz Test Probe

**P/N 2011728000**

TLB-46 Return Measurement Low-Pass Filter

**P/N 2011640000**